
# IL420 Digital Signage





## Input and Output Terminals

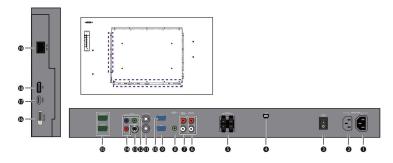

### **Features**

- NXO 6-points IR Multi-touch
- PID panel with high reliability of usage
- 50,000 hours light life for long use (24/7)
- Landscape & Portrait orientation mode support
- Display Port IO support for high video quality
- Ambient light sensor for eye care & energy saving
- RS232 & LAN control for well management
- MDA SW supported for remote management


No.	Name	Description		
0	AC OUT	Relays the AC power from the AC IN jack to another display.		
9	AC IN	Connects to a power outlet via the supplied power cord.		
ē	AC SWITCH ON/	Turns on or off the main power.		
•	OFF	furns on or on the main power.		
4	USB	Connects the US8 cable from the display to a computer to		
_		use the touch module.		
6	SPEAKERS (R/L)	Outputs audio signals to external speakers.		
6	AUDIO OUT (R/L)	Outputs audio signals to an external device.		
0	AUDIO IN	Receives audio signals from an external device		
	(AUDIO2)	(such as a VCR or DVD player).		
8	AUDIO IN	Receives audio signals from an external device		
-	(AUDIOI)	(such as a computer).		
9	VGA IN	Receives analog RGB signals from an external device (such		
_		as a computer).		
0	VGA OUT	Outputs analog RGB signals from the VGA IN input to		
_		another display.		
•	AV OUT	Receives composite video signals from an external device		
		(such as a VCR or DVD player).		
(P)	AV OUT	Outputs composite video signals from the AV IN input		
_		to another display.		
<b>(B</b> )	VIDEO IN	Receives S-Video signals from an external device		
	(S-VIDEO)	(such as a VCR or DVD player).		
<b>(</b>	VIDEO IN	Receives component video (YPbPr) signals from an external		
	(YPbPr)	device (such as a DVD player, HDTV device or Laser disc player).		
<b>(</b>	RS232C IN/	For external control and multi-display operation.		
	OUT	RS232C IN: receives control signals from a computer		
		or another display.		
		RS232C OUT: outputs control signals from the RS232C IN		
		input to another display.		
Œ	DVI-IN	Receives DVI signals from an external device		
		(such as a computer).		
Ø	HDMI	Receives HDMI signals from an external device		
		(such as a Blu-ray disc player).		
B	DISPLAY PORT	Connects to a DisplayPort compatible device.		
Ø	RJ-45	Connects to the RJ-45 port on your Ethernet or router.		
	-			




## **Product Specifications**

Daniel	C DiI	42"	
Panel	Screen Diagonal	4 <i>L</i> "  LED	
	Backlight		
	Resolution	FHD 1920 x 1080 (pixels)	
	Aspect Ratio	16:9	
	Brightness	400 nits	
	Contrast Ratio	1000:1	
	Viewing Angle	178 degree (H) / 178 degree (V)	
	Color gamut (x% NTSC)	68%	
	Frame Rate	60Hz	
	Response Time	9ms	
	Panel bit	8 bit, 16.7M	
	Light life	30,000 hrs (min.) 50,000 hrs (typ.)	
	Orientation	Landscape / Portrait	
Touch solution	Touch tech.	IR .	
	Number of touches	6 simultaneous touches	
	Resolution	32767 × 32767	
Cover glass	Thickness	Tempered, 3 mm	
-	Hardness	8H	
	Built-in speaker	12W x 2	
	'		
Interface	Input/Output	Power (AC) In/ Out x I	
	·	Audio line-in × I	
		Composite video In/ Out (BNC) × I	
		Composite audio In/ Out (RCA) × I	
		Component video (RCA) × I	
		External Speaker Out (L/R) × I	
		D-sub In/ Out × I	
		HDMI (Type A ) × I	
		DVI-D In/ Out x I	
		DisplayPort Input × I	
		RI45 × I	
		RS232 In/ Out x I	
	Others	AC power switch x I	
	Others	IR receiver x I	
		USB (Type B) for Touch Module x I	
Mechanical	Dimensions (W $\times$ H $\times$ D)	98   x 57   x   2   mm	
Геспапісаі		22.7 / 26.8 kg	
Power	Weight (without packing / with packing)	100V - 240V, 50 Hz / 60 Hz	
Power	Power supply		
OSD	Power consumption	<150W, 120W (Typ.)	
	On-Screen Display Languages	English/ French/ Portuguese/ Spanish/ Simplified Chinese/ Traditional Chinese (6 Languages)	
Touch	OS Supported	Windows XP, Win 7, Win 8:6 pts (plug & play)	
		Mac 10.7, 10.8: 6 pts (with driver installation)	
		Linux Fedora 15, Ubuntu 12.10:6 pts (with driver installation)	
Accessories	Standard	Remote Control w/ Battery x	
		Power Cord (by region) x	
		Touch pen x 0	
		Quick Start Guide × I	
		USB cable (I.8M,A-B) × I	
		VGA (D-sub I5pin) Cable x I	
	Optional	Stand	

## Product specifications

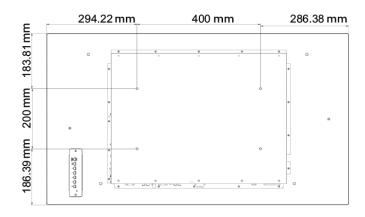

## Wallmount

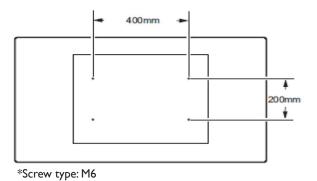

BenQ Europe B.V.

Meerenakkerweg I-17 5652 AR Eindhoven The Netherlands Tel: +31 88 8889200 Fax: +31 88 8889299

