

Panasonic
ideas for life

PT-DW5100U
PT-DW5100UL
DLP®-Based Projector

The 5,500-lm wide projector that's easy to see
even in brightly lit rooms



5,500lm


WXGA



Further expanding reliability and picture quality

Panasonic's DLP® system projectors have taken another step forward. Now they produce even better images while maintaining all of their highly reliable functions. Their 5,500-lm brightness delivers crisp, easy-to-see images even in brightly lit classrooms and meeting rooms, to make presentations easier to

understand. The PT-DW5100U/DW5100UL can also project wide-screen images. This allows them to project images onto a large area regardless of the ceiling height.



High power brightness

5,500 lm NEW

DLP® Projector
PT-**DW5100U**
PT-**DW5100UL***

*Without lens model



High brightness and high picture quality

Wide screen and high-power **5,500-lm brightness** NEW

The PT-DW5100U/DW5100UL offers a full 5,500 lumens of brightness and WXGA wide-screen projection. A newly developed AC lamp and a more efficient reflector and synthetic mirror produce crisp, sharp images even when projecting images with a wide aspect ratio in ordinary daytime lighting.

System daylight view NEW

The system daylight view function uses an image processing circuit to compensate for the loss of color saturation that occurs when light reflects onto the screen from bright surroundings. It is especially effective for producing crisp, sharp images in dark portions containing gradation. The function can be adjusted in three steps.



Projection of bright, high-quality images in large spaces such as halls, conference rooms, classrooms, theaters, and churches.

Conference rooms



Classrooms



Theaters



Churches



Vivid color control

A unique control technology is used to maximize the color segment areas of the color wheel. Compared to conventional projectors, the brightness of each color is increased by an average of about 15%. This results in sharper, clearer color reproduction.

Progressive cinema scan (3/2 Pulldown)

This interlace/progressive conversion technology automatically detects when the input signal is derived from filmed material and selects the optimum progressive processing method to assure faithful reproduction of the original image.

Full 10-bit picture processing NEW

The use of a full 10-bit image processing system provides smooth tonal expression. For example, skin tones appear natural and true to life.

3D color management system

Compensation provides optimal levels of color saturation, hue, and brightness that were not possible with conventional projectors. Colors approach those of the original image, even on large-screen displays.

New IP conversion circuit NEW

The PT-DW5100U/DW5100UL feature a new IP conversion circuit that produces more detailed images than our previous models.

Dynamic sharpness control

The dynamic sharpness control circuit adjusts the video signal waveforms based on the difference in brightness of adjacent pixels for a sharp, clear picture that is relatively unaffected by signal noise.

More effective noise reduction NEW


Images are noticeably clearer, thanks to higher-performance frame noise reduction, which lowers image graininess, and improved MPEG noise reduction, which suppresses the block noise and mosquito noise that are common in fast-action scenes.

Excellent reliability



Dual lamp system


The use of two lamp systems increases brightness and eliminates the need to interrupt a presentation if a lamp burns out (in dual lamp operation mode).

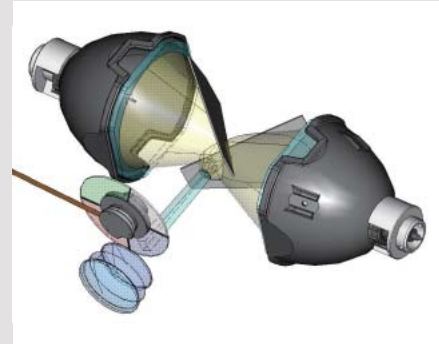

Flexible system installation

Built-in multi-screen support system

NEW

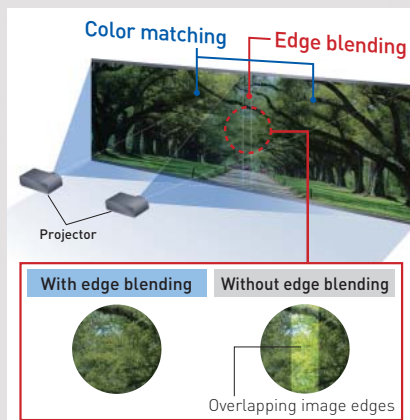

•Edge blending function

This function controls luminance at the edges where screens overlap. By eliminating unnatural screen joints, it produces uniformly attractive multi-screen displays.

•Color matching function

The Color Matching function corrects the subtle variations in color reproduction between projectors. Originally developed "adjustment assist" software quickly and precisely optimizes images, so the colors on each screen are uniformly reproduced.

•Digital image enlarging


Images are enlarged up to 10 times (horizontally and vertically) without having to use any additional devices.

Lens-centered design

A lens-centered, symmetrical design provides flexible system layout, eliminating the need for any special considerations when planning the installation site.

Horizontal/Vertical lens shift

A wide adjustment range of the horizontal/vertical lens shift assures distortion free images and adds convenience and versatility. (Horizontal : manual, Vertical : powered)

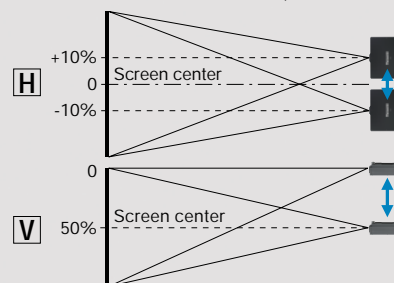


Optional lenses for various venues

Five optional lenses with different throw distances are available in addition to the supplied lens. These powered zoom/focus lenses enable the projectors to perform superbly in an array of projection environments.

Web browser control/monitoring and e-mail message alert

Anybody can operate the PT-DW5100U/DW5100UL by remote control or monitor its status over a LAN network, because it is all done using the computer's familiar Web browser. Furthermore, the PT-DW5100U/DW5100UL sends an E-mail message to notify the operator when an error has occurred, or a lamp needs to be replaced.

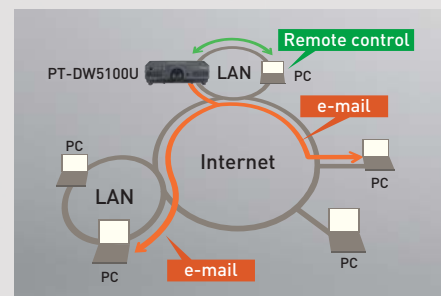

Multiple terminals

The PT-DW5100U/DW5100UL has an array of terminals—two RGB inputs including a 5-BNC connector, serial in/out, one S-video inputs, two remote in, one remote out, DVI-D and control capability—to support a broad range of projection needs HDCP. (High-Bandwidth Digital Content Protection) compliant. Using the serial terminal(RS232C),it is also possible to connect and operate AMX and Crestron control systems with ease.



AC lamp



Newly developed AC lamps with full 300 watts of power offer excellent brightness and greater reliability than other types. A new lamp drive system also lowers the stress on the lamp electrodes while the lamps are lit. The new lamps have a lifetime of approximately 3,000 hours*, which is reassuring for applications where the projector is frequently used. The AC lamps also minimize color irregularities.


*with lamp mode: low



Liquid-cooling system

Panasonic's original liquid-cooling system directly cools the DLP® chip, which extends PT-DW5100U/DW5100UL performance and attains a high level of reliability. It also enables operation in temperatures up to 113 °F/45°C for use in a wider variety of environments, and maintains a more stable performance even in harsh conditions while keeping the operating sound down to a quiet 29 dB*.

*with lamp mode: low

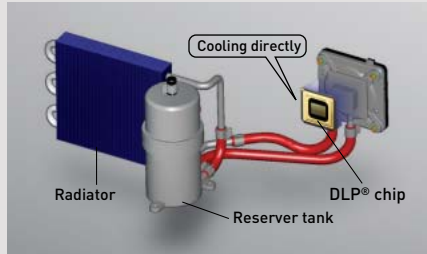

Micro cut filter

A filter in the air intake section traps dust particles that are 10 microns* or larger. By capturing approximately 7 times as much dust as conventional filters, it guards against optical blocks and reduces the penetration of dust into to the interior to provide stable operation by, for example, preventing drops in brightness.




*10-micron dust = lint, pollen, etc.

Dustproof design with sealed optical block

The effect of dust has been minimized by completely sealing the optical block. The dust-free design helps ensure that this DLP® projector will continue to deliver crisp, sharp, high-resolution images over an extended service life.

PJLink™ compatibility

The LAN terminals support PJLink™ class 1 connection. Control with the same specifications is also possible when used in a multi-projector system with projectors of another brand.

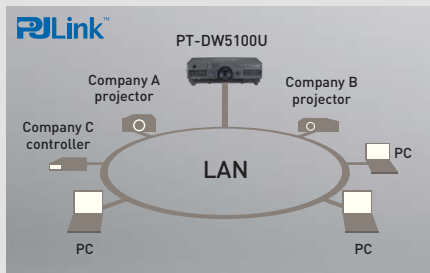

Other valuable features

Mechanical lens shutter

A mechanical lens shutter minimizes annoying light leakage when the PT-DW5100U/DW5100UL is on standby or temporarily not in use, such as during a meeting.

Direct power off

Built-in capacitor provides power to cool the internal parts. This means that you can switch off the room's main power as soon as the presentation ends. PT-DW5100U/DW5100UL doesn't make you wait around and helps minimize lamp damage.

Flexible angle setting

The PT-DW5100U/DW5100UL can be rotated vertically. This means you can install it at any up-and-down angle you wish to accommodate different installation conditions.



Easy replacement of dust filter and lamp

Dust filter is replaced from the side and lamps are replaced from the back panel. Both of them are replaced very easily even when PT-DW5100U/DW5100UL is installed.

Others

- ID assignment for up to 65 units
- Coordinated group control for up to 26 groups (A-Z)
- Digital vertical keystone correction
- Built-in test pattern
- Selectable 9-language on-screen menu (English, German, French, Spanish, Italian, Russian, Japanese, Chinese, Korean)
- Anti-theft features with chain opening

Easy lens replacement

The PT-DW5100U/DW5100UL uses the bayonet system, so lenses attach and detach with one-touch ease.



Control panel and wireless remote control



The rear control panel allows for easy operation when the PT-DW5100U/DW5100UL is set on a desk or floor. New wireless remote control with longer transmission capacity of 98 feet (30 m).



The PT-DW5100UL delivers the same performance as the PT-DW5100U, but comes without lens. Combine it with an optional lens to get the exact performance you need according to usage and operating conditions.

Ecology-conscious design

Panasonic works from every angle to minimize environmental impact in the product design, production and delivery processes, and in the performance of the product during its life cycle. The PT-DW5100U/DW5100UL reflects the following ecological considerations.

- No halogenated flame retardants are used in the cabinet.
- The packing case and operating manual are made from recycled paper.
- Lamp power switching further reduces power consumption.
- Auto Power Save activates standby mode when no signal is input.

Specifications

System	DLP® Projection system
Device	0.65" (diagonal) DLP® chip 15:9
Pixels	983,040 (1,280 x 768) x 1 total of 983,040 pixels
Lamp	300 W UHM™ lamp x 2 (Dual Lamp System)
Brightness (normal lamp)	5,500 lumens (dual lamp, high power mode)
Contrast ratio	2,000:1 (full on/full off, contrast mode: high)
Resolution	
RGB	1,280 x 768 pixels
Video	560 TV lines
Lens	
PT-DW5100U	Powered zoom/focus lens, Supplied lens: (2.0-2.6:1) F = 1.7-2.0, f = 25.6-33.8 mm
PT-DW5100UL	Optional powered zoom/focus lenses 50 - 600 inches
Screen size	Vertical (powered), horizontal (manual)
Lens shift	
RGB input scanning frequency	fr 15-91 kHz, fv 50-85 Hz Dot clock 150 MHz or lower
Component signal	480i, 480p, 576i, 576p, 720/60p, 720/50p, 1080/60i, 1080/60p 1080/50i, 1080/50p
Video signal	NTSC, NTSC4.43, PAL, PAL60, PAL-N, PAL-M, SECAM
Terminals	
VIDEO IN	BNC
S-VIDEO IN	Mini DIN 4-pin
RGB1/YPbPr IN	BNC x 5
RGB2 IN	D-sub HD 15-pin
DVI-D IN	24pin DVI 1.0 compliant, HDCP compatible, for single link
RS-232C IN	D-sub 9-pin female
RS-232C OUT	D-sub 9-pin male
REMOTE 1 IN	M3 jack
REMOTE 1 OUT	M3 jack
REMOTE 2 IN	D-sub 9-pin female (parallel)
LAN	RJ-45x1, compliant with PJLink™ (class 1), 10Base-T/100Base-TX
Keystone correction range	±30° (with standard lens)
Installation	Front/rear, ceiling/floor
Power cord length	9.9' (3.0m)
Power supply	120 V AC, 60 Hz
Power consumption	770 W (770 VA) (10 W during standby mode with fan stopped)
Dimensions (W x H x D)	20-7/8" x 6-9/16" x 16-7/8" (530 x 167 x 429 mm) (without lens)
Weight	
PT-DW5100U	30.6 lbs (13.9 kg) with supplied lens
PT-DW5100UL	28.9 lbs (13.1 kg) without lens
Operating temperature	32 - 113 °F (0 - 45 °C)
Operating humidity	20-80% (no condensation)
Supplied accessories	Power cord, Wireless/wired remote control unit, AA Batteries (x 2) for remote control


Projection distance [feet / meters]

Screen size (16:9)	Throw distance											
	With ET-DLE050 0.9:1 L		With ET-DLE100 1.4-2.0:1 min. max.		With supplied lens* 1.9-2.6:1 min. max.		With ET-DLE200 2.7-4.4:1 min. max.		With ET-DLE310 3.8-5.0:1 min. max.		With ET-DLE410 5.1-9.5:1 min. max.	
50"	2.8 0.8m	4.8 1.4m	6.5 2.0m	6.4 1.9m	8.6 2.6m	8.9 2.7m	14.6 4.4m	12.7 3.8m	16.7 5.1m	16.9 5.1m	32.0 9.7m	
80"	4.6 1.4m	7.8 2.3m	10.6 3.2m	10.5 3.2m	13.9 4.2m	14.3 4.3m	23.6 7.2m	20.6 6.2m	27.0 8.2m	27.3 8.3m	51.5 15.7m	
100"	5.8 1.7m	9.8 3.0m	13.3 4.0m	13.2 4.0m	17.4 5.3m	18.0 5.4m	29.6 9.0m	25.8 7.8m	33.8 10.3m	34.3 10.4m	64.6 19.6m	
150"	8.8 2.7m	14.8 4.5m	20.0 6.1m	19.9 6.0m	26.3 8.0m	27.1 8.2m	44.5 13.5m	38.9 11.8m	50.9 15.5m	51.7 15.7m	97.1 29.6m	
200"	11.8 3.6m	19.8 6.0m	26.8 8.1m	26.6 8.1m	35.1 10.7m	36.2 11.0m	59.4 18.1m	52.0 15.8m	68.0 20.7m	69.1 21.0m	129.6 39.5m	
300"	—	29.8 9.1m	40.2 12.2m	40.0 12.2m	52.8 16.1m	54.4 16.6m	89.3 27.2m	78.2 23.8m	102.2 31.1m	103.9 31.6m	194.6 59.3m	
400"	—	39.8 12.1m	53.7 16.3m	53.4 16.3m	70.5 21.5m	72.7 22.1m	119.1 36.3m	104.4 31.8m	136.5 41.6m	138.7 42.3m	259.7 79.1m	
500"	—	49.8 15.2m	67.2 20.5m	66.8 20.3m	88.1 26.8m	90.9 27.7m	148.9 45.4m	130.6 39.8m	170.7 52.0m	173.5 52.9m	324.7 99.0m	
600"	—	59.8 18.2m	80.7 24.6m	80.2 24.4m	105.8 32.2m	109.2 33.2m	178.8 54.5m	156.8 47.8m	204.9 62.4m	208.3 63.5m	389.8 118.8m	

* The supplied lens is used only for PT-DW5100U.

Dimensions

unit: inch [mm]

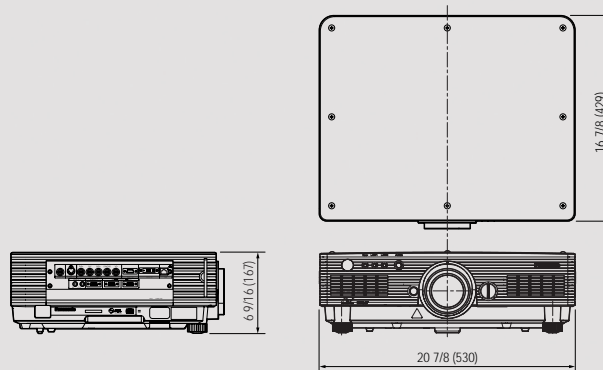

Optional accessories

Replacement Lamp Unit
ET-LAD57
ET-LAD57W (twin pack)



Zoom Lens (1.4-2.0:1)
ET-DLE100
Zoom Lens (2.7-4.4:1)
ET-DLE200
Zoom Lens (3.8-5.0:1)
ET-DLE310
Zoom Lens (5.1-9.5:1)
ET-DLE410
Fixed Focus Lens (0.9:1)
ET-DLE050



Ceiling Mount Bracket
for high ceiling
ET-PKD56H



Ceiling Mount Bracket
for low ceiling
ET-PKD55S

NOTES ON USE

Notes on Projector Placement and Operation:

The projector uses a high-wattage lamp that becomes very hot during operation. Please observe the following precautions.

- Never place objects on top of the projector while it is operating.
- Make sure there is an unobstructed space of 500 mm or more around the projector's exhaust openings.
- Do not stack projector units directly on top of one another. If two units must be stacked for backup use in ordinary projection, use a method as shown below and provide ample space between the units to ensure that exhaust heat does not accumulate near the intake opening or around the units. Dual stacked projection of the PT-DW5100U/DW5100UL is not recommended.
- If the projector is placed in a box or enclosure, ensure the temperature of the air surrounding the projector is between 0 °C/32 °F and 40 °C/104 °F*. Also make sure the projector's intake and exhaust openings are not blocked. Take particular care to ensure that hot air from the exhaust openings is not sucked into the intake openings.

* Even when the ambient temperature near the intake opening is 40 °C/104 °F or lower, an accumulation of hot air inside the cabinet may cause the protective circuit to activate and shut down the projector. Please give ample consideration to the design with regard to ambient temperature conditions.

Operating the Projector Continuously:

- If the projector is to be operated continuously 24 hours a day, use the dual-lamp optical system's alternating lamp operation (lamp changer) function. The projector cannot be operated continuously 24 hours a day in dual-lamp mode. Allow a minimum of two hours per day of non-operation time per day if using the dual-lamp mode.
- The lamp replacement cycle duration becomes shorter if the projector is operated repeatedly for short periods.
 - The projector uses a high-voltage mercury lamp that contains high internal pressure. This lamp may break, emitting a large sound, or fail to illuminate, due to impact or extended use. The length of time that it takes for the lamp to break or fail to illuminate varies greatly depending on individual lamp characteristics and usage conditions.
 - The brightness of the lamp will gradually decrease with use.

Panasonic®

Panasonic Projector Systems Company,
Unit of Panasonic Corporation of North America
www.panasonic.com/projectors

Headquarters
3 Panasonic Way, 4B-9
Secaucus, NJ 07094
888-411-1996

Panasonic Canada Inc.
5770 Ambler Drive
Mississauga, Ontario
Canada L4W 2T3
905 624 5010

For more information about Panasonic projectors. Visit —
<http://panasonic.co.jp/pavc/global/projector/>
 Please contact Panasonic or your dealer for a demonstration.



JQA-1617



Weights and dimensions shown are approximate. Specifications are subject to change without notice.

This product may be subject to export regulations. An application has been filed for trademark rights, or trademark rights have been granted, for PJLink in Japan, United States of America and other countries and area. UHM is trademark of Matsushita Electric Industrial Co., Ltd. VGA and XGA are trademarks of International Business Machines Corporation. All other trademarks are the property of their respective trademark owners. Projection images simulated.

DLP, DLP logo and DLP Medallion logo are trademarks or registered trademarks of Texas Instruments. (C) 2007 Panasonic Projector Systems Company is a Unit Company of Panasonic Corporation of North America. All rights reserved. (C) 2007 Matsushita Electric Industrial Co. Ltd. All rights reserved. PT-DW5100U1-07May20K Printed in Japan.